MPP-2017-42, CERN-TH-2017-063, IPPP/17/24

pySecDec: a toolbox for the numerical evaluation of multi-scale integrals

S. Borowka [a], G. Heinrich [b], S. Jahn [b], S. P. Jones [b], M. Kerner [b], J. Schlenk [c], T. Zirke [b]

[a] *Theoretical Physics Department, CERN, Geneva, Switzerland*

[b] *Max Planck Institute for Physics, Föhringer Ring 6, 80805 München, Germany*

[c] *Institute for Particle Physics Phenomenology, University of Durham, Durham DH1 3LE, UK*

arXiv:1703.09692v2 [hep-ph] 30 Mar 2017

Abstract

We present pySecDec, a new version of the program SecDec, which performs the factorisation of dimensionally regulated poles in parametric integrals, and the subsequent numerical evaluation of the finite coefficients. The algebraic part of the program is now written in the form of `python` modules, which allow a very flexible usage. The optimization of the C++ code, generated using `FORM`, is improved, leading to a faster numerical convergence. The new version also creates a library of the integrand functions, such that it can be linked to user-specific codes for the evaluation of matrix elements in a way similar to analytic integral libraries.

Key words: Perturbation theory, Feynman diagrams, multi-loop, numerical integration

1 Introduction

The current experiments at the Large Hadron Collider as well as future collider experiments will explore TeV energy scales, posing new challenges for both the experiments and the theoretical predictions. Radiative corrections play an important role in this situation, making it necessary to develop calculational methods and tools which can facilitate the task of calculating higher orders in perturbation theory, both for virtual (loop) corrections and real corrections, which involve extra radiation leading to infrared singularities when unresolved.

The analytic calculation of loop integrals beyond one loop has seen an enormous progress in the last few years, to a large extent due to new insights [1] into the method of differential equations [2,3]. However, as the number of mass scales increases, the analytic evaluation of two-loop integrals and beyond becomes a very challenging and tedious task. On the other hand, at high energies, where massive loops are more likely to be resolved, and where electro-weak corrections become important, multi-scale problems are ubiquitous.

In such cases, numerical approaches may be the method of choice. A method which is particularly useful in the presence of dimensionally regulated singularities is sector decomposition [4–7], as it provides an algorithm to factorise such singularities in an automated way. The coefficients of the resulting Laurent series in the regularization parameter are in general complicated, but can be integrated numerically. This has been implemented in the program SecDec [8–10], where from version 2.0 [9] the restriction to Euclidean kinematics was lifted by combining sector decomposition with a method to deform the multi-dimensional integration contour into the complex plane [11,12]. Other implementations of the sector decomposition algorithm can be found in Refs. [13–20].

In this paper, we present a completely new version of the SecDec program, called pySecDec. The algebraic part is now coded in `python` and `FORM` [21,22] rather than Mathematica. As a consequence, the new program is entirely based on open source software and allows maximal flexibility due to its modular structure. The `python` code writes `FORM` files to produce optimized *C++* functions which can be numerically integratied with Cuba [23]. The *C++* functions are by default combined into a library and thus can be linked to the calculation of, for example, a full amplitude. Therefore pySecDec can be used in a similar manner as analytic one-loop integral libraries. This opens up new possibilities for the calculation of multi-loop amplitudes where analytic results for most of the master integrals are not known.

The outline of the paper is as follows. In Section 2 we describe the structure of the program and its new features. In Section 3 we explain the installation and

usage of the program. Section 4 describes a number of examples, before we conclude in Section 5. An appendix contains an overview of possible parameter settings, where their default values are also listed.

2 Description of pySecDec

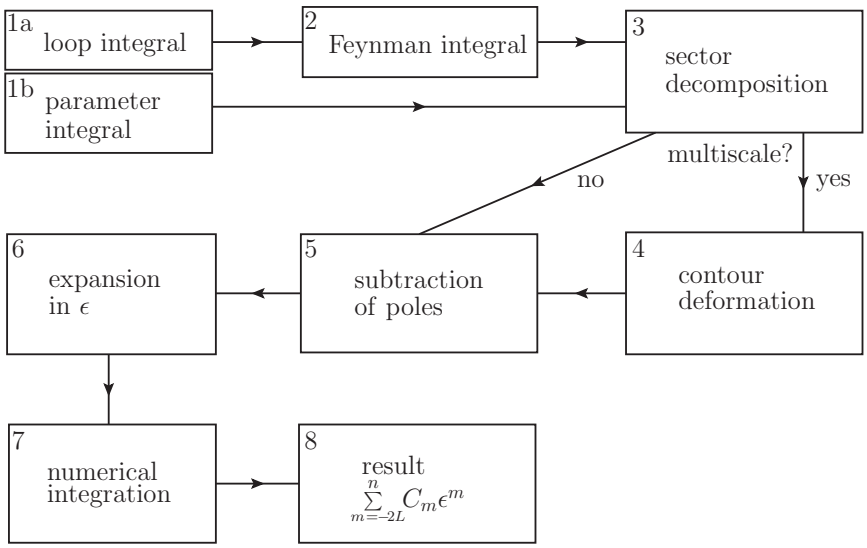

Fig. 1. Flowchart showing the main building blocks of pySecDec.

The program consists of two main parts, an algebraic part, based on `python` and `FORM` [21, 22], and a numerical part, based on *C++* code. A flowchart is shown in Fig. 1. The isolation of endpoint singularities and the subsequent numerical integration can act on general polynomial functions, as indicated in the box (1b). Loop integrals (after Feynman parametrisation) can be considered as special cases of these more general polynomial integrands. In the `python` code, this is reflected by the following structure: The `python` function `make_package` accepts a list of polynomials raised to their individual powers as input – corresponding to the box (1b). In contrast, `loop_package` takes a loop integral (e.g. from its graph or propagator representation), which corresponds to to box (1a). After Feynman parametrizing the loop integral, `loop_package` calls `make_package` for further processing. The steps (1) to (6) are performed in `python` and `FORM`, where `FORM`, after step (6), produces optimized *C++* code. The compiled integrand functions are by default combined into a library. For the numerical integration, we provide a simple interface to integrators from the Cuba [23] library. The user also has direct access to the integrand functions for example to pass them to an external integrator.

The pySecDec distribution comes with a very detailed documentation both in `html` and in `pdf` format. The manual is also available in both formats on

the webpage `http://secdec.hepforge.org`.

2.1 Algebraic part

The algebraic part consists of several modules that provide functions and classes for the purpose of the generation of the integrand, performing the sector decomposition, contour deformation, subtraction and expansion in the regularization parameter(s). The algebra modules contained in pySecDec use both `sympy` and `numpy`, but also contain the implementation of a computer algebra system tailored to the sector decomposition purposes, in order to be competitive in speed with the previous implementation in Mathematica. For example, since sector decomposition is an algorithm that acts on polynomials, a key class contained in `pySecDec.algebra` is the class `Polynomial`.

Acting on general polynomials, pySecDec is not limited to loop integrals. It can take as an integrand any product of polynomials, raised to some power, provided that the endpoint singularities are regulated by regularisation parameters, and that integrable singularities away from the integration endpoints can be dealt with by a deformation of the integration path into the complex plane. We should point out that pySecDec can perform the subtraction and expansion in several regulators, see the description of example 4.8.

For loop integrals, the program contains the module `pySecDec.loop_integral`. There are two ways to define a loop integral in pySecDec: (a) from the list of propagators, and (b) from the adjacency list defining the graph, which is roughly the list of labels of vertices connected by propagators. Examples for both alternatives to define loop integrals are given in Sections 3.2 and 4.

The availability of `python` functions which can be called individually by the user allows for a very flexible usage of pySecDec. The `html` documentation describes all the available modules and functions in detail, and also contains a "quick search" option.

2.1.1 Sector decomposition strategies

When using `loop_package`, which facilitates the definition and calculation of Feynman integrals, one can choose between the following sector decomposition strategies:

- `iterative`: Default iterative method [6, 7].
- `geometric`: Algorithm based on algebraic geometry (`G2` in SecDec 3). Details can be found in Refs. [10, 24, 25].

- `geometric_ku`: Original algorithm based on algebraic geometry introduced by Kaneko and Ueda (`G1` in SecDec 3) [16, 26].

The recommended sector decomposition algorithm based on algebraic geometry is `geometric`, since it improves on the original geometric algorithm. For general parametric integrals there are additionally the following options which can be set in `make_package`:

- `iterative_no_primary`: Iterative method without primary sector decomposition.
- `geometric_no_primary`: Geometric decomposition according to Kaneko and Ueda without primary sector decomposition.

2.2 Producing C++ code and numerical results

The module `pySecDec.code_writer` is the main module to create a *C++* library. It contains the function `pySecDec.code_writer.make_package` which can decompose, subtract and expand any polynomial expression and return the produced set of finite functions as a *C++* package, where `FORM` has been employed to write out optimised expressions. Simple examples of how to use `make_package` are described in Sections 4.7 and 4.8.

A more advanced example is given in Section 4.9, which shows how the user can define any number of additional finite functions. These functions need not be polynomial. Furthermore, the user is free to define arbitrary *C++* code (for example, a jet clustering routine) to be called by the integrand during the numerical integration. Templates for such user-defined functions will be created automatically if the field `functions`, where the names of such functions are given, is non-empty in `make_package` .

If a loop integral should be calculated, the function `loop_package` can be used, which contains methods specific to loop integrals, for example the construction of the Symanzik polynomials $\mathcal{F}$ and $\mathcal{U}$ from the list of propagators or from the adjacency list of a graph. Examples how to use the loop package are given in Sections 4.1 to 4.5.

Both `make_package` and `loop_package` will create a directory (with the name given by the user in the field `name`) which contains the main *C++* integration files and a Makefile to generate the *C++* source code and the libraries (static and dynamic) containing the integrand functions.

The library can be linked against a user-specific code, or it can be called via a `python` interface, as described in Section 4.1.

2.3 New features

In addition to the complete re-structuring, which opens up new possibilities of usage, there are various new features compared to SecDec 3:

- The functions can have any number of different regulators, not only the dimensional regulator ϵ.
- The treatment of numerators is much more flexible. Numerators can be defined in terms of contracted Lorentz vectors or inverse propagators or a combination of both.
- The distinction between "general functions" and "loop integrands" is removed in the sense that all features are available for both general polynomial functions and loop integrals (except those which only make sense in the loop context).
- The inclusion of additional "user-defined" functions which do not enter the decomposition has been facilitated and extended.
- The treatment of poles which are higher than logarithmic has been improved.
- A procedure has been implemented to detect and remap singularities at $x_i = 1$ which cannot be cured by contour deformation.
- A symmetry finder [27] has been added which can detect isomorphisms between sectors.
- Diagrams can be drawn (optionally, based on `neato` [28]; the program will however run normally if `neato` is not installed).
- The evaluation of multiple integrals or even amplitudes is now possible, using the generated *C++* library, as shown in Example 4.10.

3 Installation and usage

Here we describe briefly the installation and usage of the program. For more details we refer to the manual and to the examples.

3.1 Installation

The program can be downloaded from `http://secdec.hepforge.org`.

It relies on `python` and runs with versions 2.7 and 3. Further the packages `numpy` (`http://www.numpy.org`) and `sympy` (`http://www.sympy.org`) are required. The former is a package for scientific computing with `python`, the latter is a `python` library for symbolic mathematics.

To install pySecDec, perform the following steps

```
tar -xf pySecDec-<version>.tar.gz
cd pySecDec-<version>
make
<copy the highlighted output lines into your .bashrc>
```

The `make` command will automatically build further dependencies in addition to pySecDec itself. These are the Cuba library [23, 29] needed for multi-dimensional numerical integration, `FORM` [21, 22] for the algebraic manipulation of expressions and to produce optimized *C++* code, and Nauty [27] to find sector symmetries, thereby reducing the total number of sectors to be integrated. The lines to be copied into the `.bashrc` define environment variables which make sure that pySecDec is found by `python` and finds its aforementioned dependencies.

With our effort of shipping external dependencies with our program, we want to make sure the installation is as easy as possible for the user. The pySecDec user is strongly encouraged to cite the additional dependencies when using the program.

3.1.1 Geometric sector decomposition strategies

The program Normaliz [30, 31] is needed for the geometric decomposition strategies `geometric` and `geometric_ku`. In pySecDec version 1.0, the versions 3.0.0, 3.1.0 and 3.1.1 of Normaliz are known to work. Precompiled executables for different systems can be downloaded from
`https://www.normaliz.uni-osnabrueck.de`. We recommend to export its path to the environment of the terminal such that the *normaliz* executable is always found. Alternatively, the path can be passed directly to the functions that call it, see the manual for more information. The strategy `iterative` can be used without having Normaliz installed.

3.2 Usage

Due to its highly modular structure, modules of the program pySecDec can be combined in such a way that they are completely tailored to the user's needs. The individual building blocks are described in detail in the manual. The documentation is shipped with the tarball in `pdf` (`doc/pySecDec.pdf`) and `html` (`doc/html/index.html`) format.

We provide `python` scripts for the two main application directions of the program. One is to use pySecDec in a "standalone" mode to obtain numerical

results for individual integrals. This corresponds to a large extent to the way previous SecDec versions were used. The other allows the generation of a library which can be linked to the calculation of amplitudes or other expressions, to evaluate the integrals contained in these expressions. The different use cases are explained in detailed examples in Section 4.

To get started, we recommend to read the section "getting started" in the online documentation. The basic steps can be summarized as follows:

(1) Edit a `python` script to define the integral, the replacement rules for the kinematic invariants, the requested order in the regulator and some other options (see e.g. the one-loop box example `box1L.py`).
(2) Run the script: `python box1L.py`. This will generate a subdirectory with the "name" defined in `box1L.py`, say `box1L`.
(3) Change to the directory `box1L` and type `make`. This will create the libraries.
(4) To run the numerical integration, the easiest way is to use the `python` interface. How to do this is exemplified in the file `integrate_box1L.py`, which is in the same directory as the script `box1L.py`, and is also described in section 4.1.

The algebra package can be used for symbolic manipulations on integrals. This can be of particular interest when dealing with non-standard loop integrals, or if the user would like to interfere at intermediate stages of the algebraic part.

For example, the Symanzik polynomials $\mathcal{F}$ and $\mathcal{U}$ resulting from the list of propagators can be accessed as follows (example one-loop bubble):

```
>>> from pySecDec.loop_integral import *
>>> propagators = ['k**2', '(k - p)**2']
>>> loop_momenta = ['k']
>>> li = LoopIntegralFromPropagators(propagators,loop_momenta)
```

Then the functions $\mathcal{U}$ and $\mathcal{F}$ including their powers can be called as:

```
>>> li.exponentiated_U
( + x0 + x1)**(2*eps - 2)
>>> li.exponentiated_F
( + (-p**2)*x0*x1)**(-eps)
```

Numerators can be included in a much more flexible way than in SecDec 3, see the example in Section 4.3 and the manual.

An example where $\mathcal{F}$ and $\mathcal{U}$ are calculated from the adjacency list defining a

graph looks as follows (for a one-loop triangle with two massive propagators):

```
>>> from pySecDec.loop_integral import *
>>> internal_lines = [['0',[1,2]], ['m',[2,3]], ['m',[3,1]]]
>>> external_lines = [['p1',1],['p2',2],['-p12',3]]
>>> li = LoopIntegralFromGraph(internal_lines, external_lines)
```

Finally, we should point out that the conventions for additional prefactors defined by the user have been changed between SecDec 3 and pySecDec. The prefactor will now be multiplied automatically to the result. For example, if the user defines `prefactor`=$\Gamma(3-2\epsilon)$, this prefactor will be expanded in ϵ and included in the numerical result returned by pySecDec.

4 Examples

All the examples listed below can be found in subdirectories of the `examples` folder.

4.1 One-loop box

This example is located in `box1L`. It calculates a 1-loop box integral with one off-shell leg ($p_1^2 \neq 0$) and the propagator connecting the external legs p_1 and p_2 being massive.

The user has basically two possibilities to perform the numerical integrations:
(a) using an interactive `python` interface to call the library or
(b) inserting the numerical values for the kinematic point at *C++* level into `integrate_box1L.cpp`.

Interactive `python` interface

The commands to run this example in case (a) above are

```
python box1L.py
cd box1L
make
cd ..
python integrate_box1L.py
```

In more detail, running the `python` script `box1L.py` will create a folder called `box1L` which will contain the following files and subdirectories:

```
box1L.hpp  codegen/              Makefile       pylink/  src/
box1L.pdf  integrate_box1L.cpp   Makefile.conf  README
```

Typing '`make`' will create the source files for the integrand and the libraries '`libbox1L.a`' and '`box1L_pylink.so`', which could be linked to an external program calling these integrals. Using the `python` file `integrate_box1L.py` to perform the numerical integration, the user can edit the kinematic point and integration parameter settings directly on `python` level.

Note that pySecDec automatically creates a `pdf` file with the diagram picture if `LoopIntegralFromGraph` is used as input format.

C++ interface

In case (b), the steps to perform the algebraic part are the same as in case (a):

```
python box1L.py
cd box1L
```

Then the user has to insert the values for the kinematic point in `integrate_box1L.cpp` at the line
`const std::vector<box1L::real_t> real_parameters = {};`
which can be found at the beginning of `int main()`. Complex parameters should be given as a list of the real and imaginary part. For example, the complex numbers `1+2 i` and `2+1 i` are written as
`const std::vector<box1L::complex_t> complex_parameters={ {1.0,2.0}, {2.0,1.0} };`
If no complex parameters are present, the list `complex_parameters` should be left empty.

Typing '`make integrate_box1L`' will produce the executable `integrate_box1L`.

Loop over multiple kinematic points

The file `box1L/multiple_kinematic_points.py` shows how to integrate a number of kinematic points sequentially. The points are defined in a file `kinematics.input` and they are read in by `multiple_kinematic_points.py` (line by line).
The first entry of each line in the kinematics data file `kinematics.input` should be a string, the "name" of the kinematic point, which can serve to label the results for each point. The results are written to the file `results_box1L.txt`.

4.2 Two-loop three-point function with massive propagators

The example `triangle2L/triangle2L.py` calculates the two-loop diagram shown in Fig. 2, also called `P126`. The steps to perform to run this example (using the python interface) are

```
python triangle2L.py
cd P126
make
cd ..
python integrate_triangle.py
```

Results for this diagram can be found e.g. in [32–34].

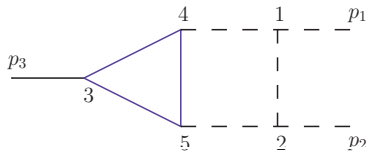

Fig. 2. Two-loop vertex graph P_{126}, containing a massive triangle loop. Solid lines are massive, dashed lines are massless. The vertices are labeled to match the construction of the integrand from the topology.

The result of pySecDec is shown in Tab. 1. A comparison of the timings with SecDec 3 for the evaluation of the finite part can be found in Table 5.

Table 1
Result for the two-loop triangle `P126` at $p_3^2 = 9$ and $m^2 = 1$.

ϵ order	pySecDec result
ϵ^{-2}	(-0.0379735 - i 0.0747738) ± (0.000375449 + i 0.000695892)
ϵ^{-1}	(0.2812615 + i 0.1738216) ± (0.003117778 + i 0.002358655)
ϵ^{0}	(-1.03936733 + i 0.2414135) ± (0.011940978 + i 0.004604699)

4.3 Two-loop four-point function with numerators

The example `box2L_numerator` shows how numerators can be treated in pySecDec. It calculates a massless planar on-shell two-loop 7-propagator box in two different ways:
(a) with the numerator defined as an inverse propagator (`box2L_invprop.py`),
(b) with the numerator defined in terms of contracted Lorentz vectors (`box2L_contracted_tensor.py`).

The integral is given by

$$I_{a_1\ldots a_8} = \int \frac{d^Dk_1}{i\pi^{\frac{D}{2}}} \frac{d^Dk_2}{i\pi^{\frac{D}{2}}} \frac{1}{[D_1]^{a_1}[D_2]^{a_2}[D_3]^{a_3}[D_4]^{a_4}[D_5]^{a_5}[D_6]^{a_6}[D_7]^{a_7}[D_8]^{a8}} \quad (1)$$
$$D_1 = k_1^2, D_2 = (k_1+p_2)^2, D_3 = (k_1-p1)^2, D_4 = (k_1-k_2)^2,$$
$$D_5 = (k_2+p_2)^2, D_6 = (k_2-p_1)^2, D_7 = (k_2+p_2+p_3)^2, D_8 = (k_1+p_3)^2.$$

In case (a), the integral $I_{1111111-1}$ is specified by `powerlist = [1,1,1,1,1,1,1,-1]` in `box2L_invprop.py`.
In case (b), the same integral is specified (in `box2L_contracted_tensor.py`) by `powerlist = [1,1,1,1,1,1,1,0]` and
`numerator = 'k1(mu)*k1(mu) + 2*k1(mu)*p3(mu) + p3(mu)*p3(mu)'`.

This example is run with following commands

`make`	*(will run and compile both **`python`** scripts)*
`./integrate_box2L`	*(will calculate the integral in both ways and print the results as well as the difference between the two results, which should be numerically zero).*

The result for $s = -3$ and $t = -2$ is listed in Tab. 2.

Table 2
Result for the two-loop four-point function with numerators at the kinematic point $s = -3, t = -2$.

ϵ order	pySecDec result
ϵ^{-4}	-0.2916 ± 0.0022
ϵ^{-3}	0.7410 ± 0.0076
ϵ^{-2}	-0.3056 ± 0.0095
ϵ^{-1}	-2.2966 ± 0.0313
ϵ^{0}	1.1460 ± 0.0504

4.4 Three-loop form factor integral

The example `formfactor3L` demonstrates how the symmetry finder can reduce the number of sectors. We consider the seven-propagator 3-loop 3-point integral depicted in Fig. 3, which is the figure that is automatically created by the code. This integral has been calculated to order ϵ in Ref. [35] and to order ϵ^4 in Ref. [36]. Here we also calculate it to order ϵ^4.

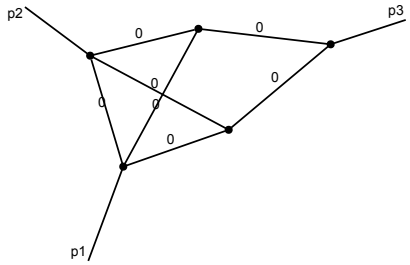

Fig. 3. Three-loop massless 7-propagator graph.

This example is run by the commands

```
python formfactor3L.py
cd formfactor3L
make
cd ..
python integrate_formfactor3L.py
```

It shows that the symmetry finder reduces the number of primary sectors to calculate from 7 to 3, and the total number of sectors from 212 to 122. For comparison, SecDec 3 produces 448 sectors using strategy X.

4.5 Integrals containing elliptic functions

In the example `elliptic2L` an integral is calculated which is known from Refs. [37, 38] to contain elliptic functions. As an example, we consider the integrals $I_{a_1 \ldots a9}$

$$
\begin{aligned}
I_{a_1 \ldots a_9} &= \int \frac{d^D k_1}{i\pi^{\frac{D}{2}}} \frac{d^D k_2}{i\pi^{\frac{D}{2}}} \frac{D_8^{-a8} D_9^{-a9}}{[D_1]^{a_1}[D_2]^{a_2}[D_3]^{a_3}[D_4]^{a_4}[D_5]^{a_5}[D_6]^{a_6}[D_7]^{a_7}} \\
&D_1 = k_1^2 - m^2, D_2 = (k_1 + p_1 + p_2)^2 - m^2, D_3 = k_2^2 - m^2, \\
&D_4 = (k_2 + p_1 + p_2)^2 - m^2, D_5 = (k_1 + p_1)^2 - m^2, D_6 = (k_1 - k_2)^2, \\
&D_7 = (k_2 - p_3)^2 - m^2, D_8 = (k_2 + p_1)^2, D_9 = (k_1 - p_3)^2.
\end{aligned}
\tag{2}
$$

The topology for $I_{110111100}$ is depicted in Fig. 4. Here we calculate the integral $f_{66}^A = (-s/m^2)^{\frac{3}{2}} I_{110111100}$ discussed in Ref. [37]. We find at the kinematic point $s = -4/3, t = -16/5, p_4^2 = -100/39, m = 1$ (Euclidean point) with the settings `epsrel`=10^{-5}, `maxeval`=10^7:

$$
f_{66}^A = 0.2470743601 \pm 6.9692 \times 10^{-6} \; . \tag{3}
$$

The analytic result [1] is given by

$$f^A_{66,\text{analytic}} = 0.247074199140732131068066 \; .$$

We also calculate the non-Euclidean point $s = 90, t = -2.5, p_4^2 = 1.6, m^2 = 1$ and find with `epsrel`=10^{-4}, `maxeval`=10^7:

$$\left(\frac{-s}{m^2}\right)^{-\frac{3}{2}} f^A_{66} = -0.04428874 + i\,0.01606818 \pm (2.456 + i\,2.662) \times 10^{-5}) \; .$$

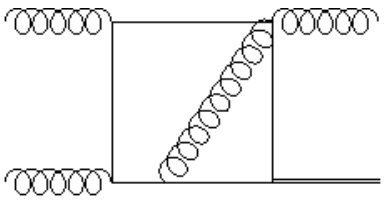

Fig. 4. Two-loop 6-propagator graph leading to elliptic functions. Curly lines denote massless particles. The box contains massive propagators with mass m. One leg (p_4) has $p_4^2 \neq 0$.

This example in the Euclidean region is run by the commands

```
python fA66.py
cd fA66
make
cd ..
python integrate_fA66.py
```

and analogous for `fA66_phys.py`.

4.6 Two-loop vertex diagram with special kinematics

In the example `Zbb_vertex_correction` we calculate an integral entering the two-loop corrections to the $Zb\bar{b}$ vertex, calculated in Refs. [39, 40], where it is called N_3.

The kinematic condition $s = M_Z^2$ leads to an integrand which is particularly difficult for the sector decomposition method because it does not have a Euclidean region. As a consequence, the integral has both endpoint singularities as well as singularities due to the fact that the second Symanzik polynomial $\mathcal{F}$ can vanish on some hyperplane in Feynman parameter space, rather than only at the origin. The remappings done by the standard sector decomposition

[1] We thank Francesco Moriello and Hjalte Frellesvig for providing us the result.

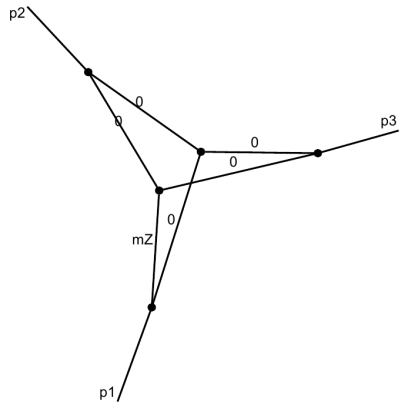

Fig. 5. The integral N_3 with one massive propagator (m_Z) and $s = p_3^2 = m_Z^2$.

algorithm would turn this into singularities at $x_i = 1$. In SecDec 3, singularities at $x_i = 1$ were treated by a split of the integration domain at $x_i = 0.5$ and subsequent remapping to the unit hypercube. However, this can lead to an infinite recursion of the problem.

pySecDec can detect and remap such "hyperplane singularities" into singularities at the origin by a dedicated spitting procedure, where a splitting at the symmetric point $x_i = 0.5$ is avoided.

The results obtained for this example are listed in Table 3.

Table 3
Numerical result from pySecDec for the integral N_3.

ϵ order	pySecDec result
ϵ^{-2}	$(1.23370112 + \mathrm{i}\,5.76 \times 10^{-7}) \pm (0.00003623 + \mathrm{i}\,0.00003507)$
ϵ^{-1}	$(2.89050847 + \mathrm{i}\,3.87659429) \pm (0.00060165 + \mathrm{i}\ 0.00070525)$
ϵ^{0}	$(0.77923028 + \mathrm{i}\,4.13308243) \pm (0.00815782 + \mathrm{i}\ 0.00923315)$

This example is run by the commands

```
python N3.py
cd N3
make
cd ..
python integrate_N3.py
```

4.7 Hypergeometric function ${}_5F_4$

As an example for a general dimensionally regulated parameter integral, which can also have endpoint-singularities at $z_i = 1$, we consider the example of

a hypergeometric function ${}_5F_4(a_1, ..., a_5; b_1, ..., b_4; \beta)$, which can be found in `Hypergeo5F4/Hypergeo5F4.py`.

The considered function has the integral representation

$$\prod_{i=1}^{4} \left[\frac{\Gamma[b_i]}{\Gamma[a_i]\Gamma[b_i - a_i]} \int_0^1 dz_i \, (1 - z_i)^{-1-a_i+b_i} z_i^{-1+a_i} \right] (1 - \beta z_1 z_2 z_3 z_4)^{a_5} \; .$$

The potential singularities at $z_i = 1$ are automatically detected by the program and remapped to the origin if the flag `split=True` is set. Results for values $a_5 = -\epsilon, a_2 = -\epsilon, a_3 = -3\epsilon, a_4 = -5\epsilon, a_5 = -7\epsilon$, $b_1 = 2\epsilon, b_2 = 4\epsilon, b_3 = 6\epsilon, b_4 = 8\epsilon, \beta = 0.5$ are shown in Tab. 4.

Table 4
Comparison of the exact result for ${}_5F_4$ with the evaluation of pySecDec, maximally using 10^9 integrand evaluations.

ϵ order	Exact result (using HypExp [41])	pySecDec result
ϵ^0	1	$1 \pm \times 10^{-15}$
ϵ^1	0.1895324	0.18953239 ± 0.0002
ϵ^2	- 2.2990427	-2.2990377 ± 0.0016
ϵ^3	55.469019	55.468712 ± 0.084
ϵ^4	- 1014.3924	-1014.3820 ± 0.89

This example is run by the commands

```
python Hypergeo5F4.py
cd H_5F4
make
cd ..
python integrate_5F4.py
```

4.8 Function with two different regulators

This example can be found in `two_regulators/two_regulators.py`. We consider the integral [2]

[2] We thank Guido Bell and Rudi Rahn for providing this example.

$$I = e^{-\gamma_E(2\epsilon+\alpha)} \int_0^1 dz_0 \int_0^1 dz_1\, z_0^{-1-2\epsilon-\alpha}(1-z_0)^{-1+2\epsilon+\alpha} z_1^{-\epsilon+\frac{\alpha}{2}}\, e^{-z_0/(1-z_0)} \quad (4)$$
$$= \frac{2}{\alpha}\Gamma(-2\epsilon-\alpha)\, e^{-\gamma_E(2\epsilon+\alpha)}$$
$$= -\frac{1}{\alpha\epsilon} + \frac{1}{2\epsilon^2} - \frac{\pi^2}{6} + \mathcal{O}(\alpha,\epsilon)\ .$$

The regulators are specified in a list as `regulators = ['alpha','eps']`. The orders to be calculated in each regulator are defined in a list where the position of each entry matches the one in the regulator list. For example, if the integral should be calculated up to the zeroth order in the regulator α and to first order in ϵ, the corresponding input would be `requested_orders = [0,1]`.

This example is run by the commands

```
python two_regulators.py
cd alpha_epsilon
make
cd ..
python integrate_two_regulators.py
```

4.9 User-defined additional functions

The user has several possibilities to define functions which are not included in the decomposition procedure itself, and therefore can be non-polynomial or be defined by an arbitrary *C++* function, for example a jet algorithm or the definition of an event shape variable. These examples are contained in the subdirectory `userdefined_cpp` and consist of three examples, `dummyI.py`, `dummyII.py` and `thetafunction.py`.

4.9.1 Analytic functions not entering the decomposition

The functions defined in the example `dummyI.py` are called `dum1` and `dum2`. (The user can give them any name which is not a reserved `python` function). `functions = ['dum1', 'dum2']` declares these names. The dependence of these functions on a number of arguments is given in
`remainder_expression = '(dum1(z0,z1,z2,z3) + 5*eps*z0)**(1+eps) * dum2(z0,z1,alf)**(2-6*eps)'`.
The above line shows that it is possible both to give the explicit definitions in the `python` input files or only the argument list, with the explicit definitions defined later in `[process_directory]/src/functions.hpp`. A template for this file will be created automatically together with the process directory. (In our example the appropriate functions are copied to the process directory in

the last line of `dummyI.py`). Note that the arguments in `functions.hpp` are the ones that occur in the argument list of the function in `dummyI.py`, in the same order. They can be both integration variables and parameters. Derivatives of the functions are only needed if higher than logarithmic poles are involved. For example, '`ddum1d0`' means the first derivative of the function with name '`dum1`' with respect to its first argument.

If the extra functions are simple, they can also be defined explicitly in the `python` input file in `remainder_expression =` '*define explicit function here*' This is done in the example `dummyII.py`. In this case, the definition of functions like `dum1,dum2` is obsolete. The definitions given in `remainder_expression` will be multiplied verbatim to the polynomials to decompose.

4.9.2 User-defined functions

The user can also define *C++* functions which cannot be defined by a simple analytic function, as they contain `if` statements, `for` loops, etc., as may be needed for example to define measurement functions or observables. For such cases, we provide a *C++* template `functions.cpp` where the user can define additional functions. An example is given in `thetafunction.py`, showing how to define an extra non-analytic function like a theta-function acting on one of the integration parameters. In the `python` input file, it is defined as `remainder_expression = 'cut1(z1,delt)'`. Once the process directory is created, the function `cut1` should be defined in `[process_directory]/src/functions.hpp` (in our example, the appropriate function is copied to the process directory in the last line of `thetafunction.py` already for the user's convenience). The function definition can look like the following:

```
template<typename T0, typename T1>
integrand_return_t cut1(T0 arg0, T1 arg1)
{
if (arg0 < arg1)
return 0.;
else
return 1.;
};
```

The first argument (`arg0`) corresponds to `z1`, the second one (`arg1`) is the cut parameter `delta`.

4.10 Four-photon amplitude

This example, contained in `4photon1L`, calculates the one-loop four-photon amplitude $\mathcal{M}^{++--}$. Running '`make amp`' will produce the libraries for the two-point and four-point functions entering the amplitude, and compile the file `amp.cpp` where the amplitude is defined. Executing '`./amp`' will evaluate the amplitude and also give the analytic result for comparison.

The amplitude for 4-photon scattering via a massless fermion loop can be expressed in terms of three independent helicity amplitudes, $\mathcal{M}^{++++}$, $\mathcal{M}^{+++-}$, $\mathcal{M}^{++--}$, out of which the remaining helicity amplitudes forming the full amplitude can be reconstructed using crossing symmetry, Bose-symmetry and parity. Omitting an overall factor of α^2, the analytic expressions read (see e.g. [42])

$$\begin{aligned}
&\mathcal{M}^{++++} = 8 \quad , \quad \mathcal{M}^{+++-} = -8 \, , \\
&\mathcal{M}^{++--} = -8\Big[1 + \frac{t-u}{s}\log\left(\frac{t}{u}\right) + \frac{t^2+u^2}{2s^2}\left(\log\left(\frac{t}{u}\right)^2 + \pi^2\right)\Big] \, .
\end{aligned} \tag{5}$$

Up to an overall phase factor, the amplitude $\mathcal{M}^{++--}$ can be expressed in terms of one-loop integrals as

$$\mathcal{M}^{++--} = -8\left\{1 + \frac{t^2+u^2}{s} I_4^{D+2}(t,u) + \frac{t-u}{s}\left(I_2^D(u) - I_2^D(t)\right)\right\} \, . \tag{6}$$

The purpose of our simple example is to show how pySecDec can be used to calculate the master integrals occurring in the amplitude $\mathcal{M}^{++--}$.

4.11 Comparison of timings

Table 5
Comparison of timings using pySecDec and SecDec 3.

Example	pySecDec timings (s) (algebraic, numerical)	SecDec 3 timings (s) (algebraic, numerical)
P_{126}	(78.5, 27.5)	(78, 57.5)
formfactor3L	(685, 0.3)	(127, 1.5)
f^A_{66}, Euclidean point	(32, 0.01)	(8, 0.3)
f^A_{66}, physical point	(97, 7.6)	(47, 9.8)
box2L with inverse propagator	(1364, 5.4)	(189, 6.5)

We compare the timings for several of the above mentioned examples between pySecDec and SecDec 3, where we distinguish between the time needed to perform the algebraic and the numeric part. In Tab. 5, the compilation of the generated *C++* functions is included in the algebraic part, because it needs to be done only once. The timings for the numerical part are the wall clock times for the evaluation of the *C++* functions.

The timings were taken on a four-core Intel(R) Core(TM) i7-3770 CPU @ 3.40GHz machine, using the default integration settings of pySecDec, and the same settings in SecDec 3. In particular, this implies a rather low desired relative accuracy of 10^{-2}. The numerical integration times in pySecDec are reduced with respect to SecDec 3, which is mostly due to a better optimization during the algebraic part, and partly also due to a more efficient deformation of the integration contour in pySecDec.

5 Conclusions

We have presented a new version of the program SecDec, called pySecDec, which is publicly available at `http://secdec.hepforge.org`. The program pySecDec is entirely based on open source software (`python`, `FORM`, Cuba) and can be used in various contexts. The algebraic part can isolate poles in any number of regulators from general polynomial expressions, where Feynman integrals are a special case of. For the numerical part, a library of *C++* functions is created, which allows very flexible usage, and in general outperforms SecDec 3 in the numerical evaluation times. In particular, it extends the functionality of the program from the evaluation of individual (multi-)loop integrals to the evaluation of larger expressions containing multiple analytically unknown integrals, as for example two-loop amplitudes. Such an approach already has been used successfully for the two-loop integrals entering the full NLO corrections to Higgs boson pair production. Therefore pySecDec can open the door to the evaluation of higher order corrections to multi-scale processes which are not accessible by semi-analytical approaches.

Acknowledgements

We would like to thank Viktor Papara, Rudi Rahn and Andries Waelkens for useful comments and Hjalte Frellesvig and Francesco Moriello for providing numbers for comparison. This research was supported in part by the Research Executive Agency (REA) of the European Union under the Grant Agreement PITN-GA2012316704 (HiggsTools) and the ERC Advanced Grant

MC@NNLO (340983). S. Borowka gratefully acknowledges financial support by the ERC Starting Grant "MathAm" (39568).

A Parameter settings

A.1 Algebraic part

The settings for the algebraic part are listed and explained in detail in the section "Code Writer/Make Package" in the documentation, as well as in the section "Loop Integral" for settings which are specific to loop integrals.

A.1.1 Loop package

The parameters for `loop_package` are:

name : string. The name of the *C++* namespace and the output directory.
loop_integral : The loop integral to be computed, defined via `pySecDec.loop_integral.LoopIntegral` (see below).
requested_orders : integer. The expansion in the regulator will be computed to this order.
real_parameters : iterable of strings or sympy symbols, optional. Parameters to be interpreted as real numbers, e.g. Mandelstam invariants and masses.
complex_parameters : iterable of strings or sympy symbols, optional. Parameters to be interpreted as complex numbers, e.g. masses in a complex mass scheme.
contour_deformation (True) : bool, optional. Whether or not to produce code for contour deformation.
additional_prefactor (1) : string or sympy expression, optional. An additional factor to be multiplied to the loop integral. It may depend on the regulator, the real parameters and the complex parameters.
form_optimization_level (2) : integer out of the interval [0,3], optional. The optimization level to be used in `FORM`.
form_work_space ('500M') : string, optional. The `FORM` WorkSpace.
decomposition_method : string, optional. The strategy for decomposing the polynomials. The following strategies are available:
- 'iterative' (default)
- 'geometric'
- 'geometric_ku'

normaliz_executable ('normaliz') : string, optional. The command to run normaliz. normaliz is only required if `decomposition_method` is set to 'geometric' or 'geometric_ku'.

enforce_complex (False) : bool, optional. Whether or not the generated integrand functions should have a complex return type even though they might be purely real. The return type of the integrands is automatically complex if `contour_deformation` is True or if there are complex parameters. In other cases, the calculation can typically be kept purely real. Most commonly, this flag is needed if the logarithm of a negative real number can occur in one of the integrand functions. However, pySecDec will suggest setting this flag to True in that case.

split (False) : bool, optional. Whether or not to split the integration domain in order to map singularities at 1 back to the origin. Set this option to True if you have singularities when one or more integration variables are equal to one.

ibp_power_goal (-1) : integer, optional. The `power_goal` that is forwarded to the integration by parts routine. Using the default setting, integration by parts is applied until no linear or higher poles remain in the integral. We refer to the documentation for more detailed information.

use_dreadnaut (True) : bool or string, optional. Whether or not to use `dreadnaut` to find sector symmetries.

The main keywords to define loop integrals from a "graphical representation" (`LoopIntegralFromGraph`) are:

internal_lines : list defining the propagators as connections between labelled vertices, where the first entry of each element denotes the mass of the propagator, e.g. `[[‘m’, [1,2]], [‘0’, [2,1]]]`.

external_lines : list of external line specifications, consisting of a string for the external momentum and a string or number labelling the vertex, e.g. `[[‘p1’, 1], [‘p2’, 2]]`.

replacement_rules : symbolic replacements to be made for the external momenta, e.g. definition of Mandelstam variables. Example: `[(‘p1*p2’, ‘s’), (‘p1**2’, 0)]` where `p1` and `p2` are external momenta. It is also possible to specify vector replacements, e.g. `[(‘p4’, ‘-(p1+p2+p3)’)]`.

Feynman_parameters ('x') : iterable or string, optional. The symbols to be used for the Feynman parameters. If a string is passed, the Feynman parameter variables will be consecutively numbered starting from zero.

regulator (ϵ) : string or sympy symbol, optional. The symbol to be used for the dimensional regulator. Note: If you change this symbol, you have to adapt the dimensionality accordingly.

regulator_power (0) : integer. The numerator will be multiplied by the regulator (ϵ) raised to this power. This can be used to ensure that the numerator is finite in the limit $\epsilon \to 0$.

dimensionality (4-2ϵ) : string or sympy expression, optional. The dimensionality of the loop momenta.

powerlist : iterable, optional. The powers of the propagators, possibly dependent on the regulator. The ordering must match the ordering of the

propagators given in `internal_lines`.

For `LoopIntegralFromPropagators`:

propagators : iterable of strings or sympy expressions. The propagators in momentum representation, e.g. `['k1**2', '(k1-k2)**2 - m1**2']`.
loop_momenta : iterable of strings or sympy expressions. The loop momenta, e.g. `['k1','k2']`.
external_momenta : iterable of strings or sympy expressions, optional. The external momenta, e.g. `['p1','p2']`. Specifying the external momenta is only required when a numerator is to be constructed.
Lorentz_indices : iterable of strings or sympy expressions, optional. Symbols to be used as Lorentz indices in the numerator.
numerator (1) : string or sympy expression, optional. The numerator of the loop integral. Scalar products must be passed in index notation, e.g. `k1(mu)*k2(mu)+p1(mu)*k2(mu)`. All Lorentz indices must be explicitly defined using the parameter `Lorentz_indices`.
metric_tensor ('g') : string or sympy symbol, optional. The symbol to be used for the (Minkowski) metric tensor $g^{\mu\nu}$.

Note: The parameters `replacement_rules, regulator, dimensionality, powerlist, regulator_power` are available for both, `LoopIntegralFromGraph` and `LoopIntegralFromPropagators`.

A.1.2 Make package

The parameters for `make package` are:

name : string. The name of the *C++* namespace and the output directory.
integration_variables : iterable of strings or sympy symbols. The variables that are to be integrated from 0 to 1.
regulators : iterable of strings or sympy symbols. The (UV/IR) regulators of the integral.
requested_orders : iterable of integers. Compute the expansion in the regulators to these orders.
polynomials_to_decompose : iterable of strings or sympy expressions. The polynomials to be decomposed.
polynomial_names : iterable of strings. Assign symbols for the polynomials to decompose. These can be referenced in the `other_polynomials`.
other_polynomials : iterable of strings or sympy expressions. Additional polynomials where no decomposition is attempted. The symbols defined in `polynomial_names` can be used to reference the `polynomials_to_decompose`. This is particularly useful when computing loop integrals where the numerator can depend on the first and second Symanzik polynomials. Note that the `polynomial_names` refer to the `polynomials_to_decompose` without their

exponents.

prefactor : string or sympy expression, optional. A factor that does not depend on the integration variables. It can depend on the regulator(s) and the kinematic invariants. The result returned by pySecDec will contain the expanded prefactor.

remainder_expression : string or sympy expression, optional. An additional expression which will be considered as a multiplicative factor.

functions : iterable of strings or sympy symbols, optional. Function symbols occurring in `remainder_expression`. Note: The power function pow and the logarithm log are already defined by default. The log uses the nonstandard continuation from a negative imaginary part on the negative real axis (e.g. $\log(-1) = -i\,\pi$).

form_insertion_depth (5) : non-negative integer, optional. How deep FORM should try to resolve nested function calls.

contour_deformation_polynomial : string or sympy symbol, optional. The name of the polynomial in `polynomial_names` that is to be continued to the complex plane according to a $-i\delta$ prescription. For loop integrals, this is the second Symanzik polynomial F, and this will be done automatically in `loop_package`. If not provided, no code for contour deformation is created.

positive_polynomials : iterable of strings or sympy symbols, optional. The names of the polynomials in `polynomial_names` that should always have a positive real part. For loop integrals, this applies to the first Symanzik polynomial U. If not provided, no polynomial is checked for positiveness. If `contour_deformation_polynomial` is None, this parameter is ignored.

Note: All parameters (except `loop_integral`) described under `loop_package` are also available in `make_package`.

A.2 C++ part

The default settings for the numerical integration are listed in the section "Integral Interface" in the documentation. We also list the defaults and a short description for the main parameters here. The values in brackets behind the keywords denote the defaults.

A.2.1 Contour deformation parameters and general settings

real_parameters : iterable of float. The real parameters of the library (e.g. kinematic invariants in the case of loop integrals).

complex_parameters : iterable of complex. The complex parameters of the library (e.g. complex masses).

together (True) : bool. Determines whether to integrate the sum of all sec-

tors or to integrate the sectors separately.

number_of_presamples (100000) : unsigned int, optional. The number of samples used for the contour optimization. This option is ignored if the integral library was created with contour deformation set to 'False'.

deformation_parameters_maximum (1.0) : float, optional. The maximal value the deformation parameters λ_i can obtain. If number_of_presamples=0, all λ_i are set to this value. This option is ignored if the integral library was created without deformation.

deformation_parameters_minimum (10^{-5}) : float, optional. The minimal value for the deformation parameters λ_i. This option is ignored if the integral library was created without deformation.

deformation_parameters_decrease_factor (0.9) : float, optional. If the sign check (the imaginary part always must be negative) with the optimized λ_i fails, all λ_i are multiplied by this value until the sign check passes. This option is ignored if the integral library was created without deformation.

real_complex_together (False) : If true, real and imaginary parts are evaluated simultaneously. If the grid should be optimally adapted to both real and imaginary part, it is more advisable to evaluate them separately.

A.2.2 CUBA *parameters*

Table 6
Default settings for integrator-specific parameters.

Vegas	Suave	Divonne	Cuhre
nstart (1000)	nnew (1000)	key1 (2000)	key (0)
nincrease (500)	nmin (10)	key2 (1)x, key3 (1)	
nbatch (1000)	flatness (25.0)	maxpass (4)	
		border (0.0)	
		maxchisq (1.0)	
		mindeviation (0.15)	

Common to all integrators:

epsrel (0.01) : The desired relative accuracy for the numerical evaluation.

epsabs (10^{-7}) : The desired absolute accuracy for the numerical evaluation.

flags (0) : Sets the CUBA verbosity flags. The flags=2 means that the CUBA input parameters and the result after each iteration are written to the log file of the numerical integration.

seed (0) : The seed used to generate random numbers for the numerical integration with Cuba.

maxeval (1000000) : The maximal number of evaluations to be performed by the numerical integrator.

mineval (0) : The number of evaluations which should at least be done before the numerical integrator returns a result.

For the description of the more specific parameters, we refer to the CUBA manual. Our default settings are given in Table 6.

References

[1] J. M. Henn, *Multiloop integrals in dimensional regularization made simple*, *Phys. Rev. Lett.* **110** (2013) 251601, [1304.1806].

[2] A. V. Kotikov, *Differential equation method: The Calculation of N point Feynman diagrams*, *Phys. Lett.* **B267** (1991) 123–127.

[3] T. Gehrmann and E. Remiddi, *Differential equations for two loop four point functions*, *Nucl. Phys.* **B580** (2000) 485–518, [hep-ph/9912329].

[4] K. Hepp, *Proof of the Bogolyubov-Parasiuk theorem on renormalization*, *Commun. Math. Phys.* **2** (1966) 301–326.

[5] M. Roth and A. Denner, *High-energy approximation of one-loop Feynman integrals*, *Nucl. Phys.* **B479** (1996) 495–514, [hep-ph/9605420].

[6] T. Binoth and G. Heinrich, *An automatized algorithm to compute infrared divergent multi-loop integrals*, *Nucl. Phys.* **B585** (2000) 741–759, [hep-ph/0004013].

[7] G. Heinrich, *Sector Decomposition*, *Int. J. Mod. Phys.* **A23** (2008) 1457–1486, [0803.4177].

[8] J. Carter and G. Heinrich, *SecDec: A general program for sector decomposition*, *Comput.Phys.Commun.* **182** (2011) 1566–1581, [1011.5493].

[9] S. Borowka, J. Carter and G. Heinrich, *Numerical Evaluation of Multi-Loop Integrals for Arbitrary Kinematics with SecDec 2.0*, *Comput.Phys.Commun.* **184** (2013) 396–408, [1204.4152].

[10] S. Borowka, G. Heinrich, S. P. Jones, M. Kerner, J. Schlenk and T. Zirke, *SecDec-3.0: numerical evaluation of multi-scale integrals beyond one loop*, *Comput. Phys. Commun.* **196** (2015) 470–491, [1502.06595].

[11] D. E. Soper, *Techniques for QCD calculations by numerical integration*, *Phys. Rev.* **D62** (2000) 014009, [hep-ph/9910292].

[12] S. Beerli, *A New method for evaluating two-loop Feynman integrals and its application to Higgs production*, .

[13] C. Bogner and S. Weinzierl, *Resolution of singularities for multi-loop integrals*, *Comput.Phys.Commun.* **178** (2008) 596–610, [0709.4092].

[14] J. Gluza, K. Kajda, T. Riemann and V. Yundin, *Numerical Evaluation of Tensor Feynman Integrals in Euclidean Kinematics*, *Eur.Phys.J.* **C71** (2011) 1516, [1010.1667].

[15] T. Ueda and J. Fujimoto, *New implementation of the sector decomposition on FORM*, *PoS* **ACAT08** (2008) 120, [0902.2656].

[16] T. Kaneko and T. Ueda, *Sector Decomposition Via Computational Geometry*, *PoS* **ACAT2010** (2010) 082, [1004.5490].

[17] A. Smirnov and M. Tentyukov, *Feynman Integral Evaluation by a Sector decomposiTion Approach (FIESTA)*, *Comput.Phys.Commun.* **180** (2009) 735–746, [0807.4129].

[18] A. Smirnov, V. Smirnov and M. Tentyukov, *FIESTA 2: Parallelizeable multiloop numerical calculations*, *Comput.Phys.Commun.* **182** (2011) 790–803, [0912.0158].

[19] A. V. Smirnov, *FIESTA 3: cluster-parallelizable multiloop numerical calculations in physical regions*, *Comput.Phys.Commun.* **185** (2014) 2090–2100, [1312.3186].

[20] A. V. Smirnov, *FIESTA4: Optimized Feynman integral calculations with GPU support*, *Comput. Phys. Commun.* **204** (2016) 189–199, [1511.03614].

[21] J. A. M. Vermaseren, *New features of FORM*, math-ph/0010025.

[22] J. Kuipers, T. Ueda and J. A. M. Vermaseren, *Code Optimization in FORM*, *Comput. Phys. Commun.* **189** (2015) 1–19, [1310.7007].

[23] T. Hahn, *CUBA: A library for multidimensional numerical integration*, *Comput. Phys. Commun.* **168** (2005) 78–95, [hep-ph/0404043].

[24] J. Schlenk and T. Zirke, *Calculation of Multi-Loop Integrals with SecDec-3.0*, in *Proceedings, 12th International Symposium on Radiative Corrections (Radcor 2015) and LoopFest XIV (Radiative Corrections for the LHC and Future Colliders): Los Angeles, CA, USA, June 15-19, 2015*, 2016. 1601.03982.

[25] J. Schlenk, *Techniques for higher order corrections and their application to LHC phenomenology*. PhD thesis, Technical University Munich, 2016.

[26] T. Kaneko and T. Ueda, *A Geometric method of sector decomposition*, *Comput.Phys.Commun.* **181** (2010) 1352–1361, [0908.2897].

[27] B. D. McKay and A. Piperno, *Practical graph isomorphism, II*, *ArXiv e-prints* (Jan., 2013) , [1301.1493].

[28] http://www.graphviz.org.

[29] T. Hahn, *Concurrent Cuba*, 1408.6373.

[30] W. Bruns, B. Ichim and C. Söger, *The power of pyramid decomposition in Normaliz*, *ArXiv e-prints* (June, 2012) , [1206.1916].

[31] W. Bruns, B. Ichim, T. Römer and C. Söger, "Normaliz. Algorithms for rational cones and affine monoids. Available from http://www.math.uos.de/normaliz."

[32] A. I. Davydychev and M. Kalmykov, *Massive Feynman diagrams and inverse binomial sums*, *Nucl.Phys.* **B699** (2004) 3–64, [hep-th/0303162].

[33] A. Ferroglia, M. Passera, G. Passarino and S. Uccirati, *Two loop vertices in quantum field theory: Infrared convergent scalar configurations*, *Nucl.Phys.* **B680** (2004) 199–270, [hep-ph/0311186].

[34] R. Bonciani, P. Mastrolia and E. Remiddi, *Master integrals for the two loop QCD virtual corrections to the forward backward asymmetry*, *Nucl.Phys.* **B690** (2004) 138–176, [hep-ph/0311145].

[35] G. Heinrich, T. Huber and D. Maitre, *Master integrals for fermionic contributions to massless three-loop form-factors*, *Phys. Lett.* **B662** (2008) 344–352, [0711.3590].

[36] A. von Manteuffel, E. Panzer and R. M. Schabinger, *On the Computation of Form Factors in Massless QCD with Finite Master Integrals*, *Phys. Rev.* **D93** (2016) 125014, [1510.06758].

[37] R. Bonciani, V. Del Duca, H. Frellesvig, J. M. Henn, F. Moriello and V. A. Smirnov, *Two-loop planar master integrals for Higgs→ 3 partons with full heavy-quark mass dependence*, *JHEP* **12** (2016) 096, [1609.06685].

[38] A. Primo and L. Tancredi, *On the maximal cut of Feynman integrals and the solution of their differential equations*, *Nucl. Phys.* **B916** (2017) 94–116, [1610.08397].

[39] J. Fleischer, A. V. Kotikov and O. L. Veretin, *Analytic two loop results for selfenergy type and vertex type diagrams with one nonzero mass*, *Nucl. Phys.* **B547** (1999) 343–374, [hep-ph/9808242].

[40] I. Dubovyk, A. Freitas, J. Gluza, T. Riemann and J. Usovitsch, *30 years, some 700 integrals, and 1 dessert, or: Electroweak two-loop corrections to the $Z\bar{b}b$ vertex*, *PoS* **LL2016** (2016) 075, [1610.07059].

[41] T. Huber and D. Maitre, *HypExp: A Mathematica package for expanding hypergeometric functions around integer-valued parameters*, *Comput. Phys. Commun.* **175** (2006) 122–144, [hep-ph/0507094].

[42] T. Binoth, E. W. N. Glover, P. Marquard and J. J. van der Bij, *Two loop corrections to light by light scattering in supersymmetric QED*, *JHEP* **05** (2002) 060, [hep-ph/0202266].